

PRODUCT CODE 0034

TRACTOR EMULSION

Asian Paints Tractor Emulsion gives a smooth finish to the wall. It is a smart choice if you have been previously using distemper.

PRODUCT BENEFITS

A Smart Upgrade

Tractor Emulsion is the perfect way to make a smart upgrade from distempers. It offers the finish of plastic paint, at a cost that is not too different from distemper. It gives **more** coverage **than** distemper, so you need less material. It also lasts for longer than distemper.

Smooth finish

Tractor Emulsion offers your walls a smooth emulsion finish, making it the perfect value for money paint.

Colour

Tractor Emulsion offers a wide range of shades (1600+). So you can choose your favourite colours for your home.




WATER BASED

LEAD FREE* GUARANTEE


* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2008.

PRODUCT FEATURES

WASHABILITY

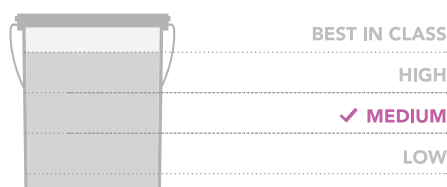


AVAILABLE PACKS

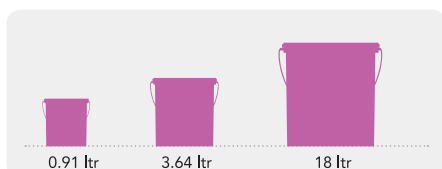


COLOURS AVAILABLE

1600+*

*Currently available in more than 1600 shades as per the Asian Paints Colour Spectra.



FINISH

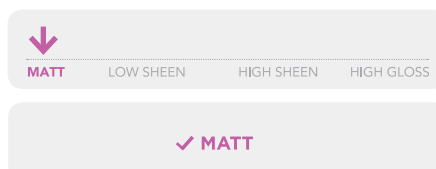

COVERAGE

On normal masonry surface after brushing



1 COAT

140-160 sq.ft/ltr**



2 COATS

70 - 80 sq.ft/ltr**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.








CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Asian Paints TruCare Exterior Wall Primer Sealer.



FILLING FOR HOLES & DENTS In case of dents and holes use Asian Paints TruCare Acrylic Wall Putty or white cement and fine sand in the ratio 1:3.

PAINT APPLICATION PROCESS

APPLICATION	CODE	THINNER	DILUTION %	APPLICATION VISCOSITY¹	RECOATING PERIOD
STEP 1 SANDING					
SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN					
STEP 2 TruCare WALL PRIMER SEALER-ST/ TruCare WALL PRIMER SEALER-WB BRUSH/ROLLER/SPRAY	0061	 Thinner T-101	BRUSH / ROLLER 10 - 15 SPRAY 15 - 20	BRUSH / ROLLER 35 - 50 SPRAY 20 - 25	8 - 10 HRS
	0060	 WATER	80% – 100 %	BRUSH / ROLLER 30 - 40 SPRAY 20 - 25	4 - 6 HRS
STEP 3 TruCare ACRYLIC WALL PUTTY PUTTY KNIFE	0064	 WATER	BASED ON REQUIREMENT	N/A	6 - 8 HRS
STEP 4 SANDING					
SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN					
STEP 5 TruCare WALL PRIMER SEALER-ST/ TruCare WALL PRIMER SEALER-WB BRUSH/ROLLER/SPRAY	0061	 Thinner T-101	BRUSH / ROLLER 10 - 15 SPRAY 15 - 20	BRUSH / ROLLER 35 - 50 SPRAY 20 - 25	8 - 10 HRS
	0060	 WATER	80% – 100 %	BRUSH / ROLLER 30 - 40 SPRAY 20 - 25	4 - 6 HRS
STEP 6 SANDING					
SAND THE SURFACE WITH SAND PAPER 220 AND WIPE CLEAN					
STEP 7 FIRST COAT TRACTOR EMULSION BRUSH/ROLLER/SPRAY	0034	 WATER	BRUSH / ROLLER 50 - 60 SPRAY 65 - 75	BRUSH / ROLLER 50 - 70 SPRAY 22 - 25	4 HRS
STEP 8 SECOND COAT TRACTOR EMULSION BRUSH/ROLLER/SPRAY	0034	 WATER	BRUSH / ROLLER 50 - 60 SPRAY 65 - 75	BRUSH / ROLLER 50 - 70 SPRAY 22 - 25	4 HRS

1. As measured through a Ford cup.

2. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions.

HOW TO CHOOSE COLOURS

Browse through Asian Paints colour tools to help you find the right colour combination

COLOUR SPECTRA FAN DECK*

INTERIOR COLOUR COMBINATIONS GUIDE

TRACTOR EMULSION SHADE CARD



*These shades are for reference only. Please refer to the Colour Spectra or Colour Palette for correct shade reference

ADDITIONAL INFORMATION

POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

PRECAUTIONS

- Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- Do not over-thin or over-extend the brush.
- Tint using Asian Paints machine colourants only
- Stir well and strain before use.
- Tinted paints need thorough shaking immediately after tinter addition as well as before use.

TECHNICAL DETAILS

- a. Drying time:** Surface dry time 30 min
- b. Sheen levels:** 2 - 5 at 60 deg GH
- c. Flash point IS101/1987 Part 1, Sec 6:** NA
- d. Stability of thinned paint:** To be used within 12 hours.

SAFETY FEATURES

- Kindly refer to the MSDS for Asian Paints Tractor Emulsion which gives detailed information on safety measures while handling the paint, which is available on request.
- Store the container with the lid tightly closed in an upright position, in a cool, dry place
- Keep out of reach of children and away from eatables.
- May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- Do not pour leftover paint down the drain or in water courses.
- In the event of spills, contain spillage using sand or earth.
- No added Lead, Mercury or Chromium compounds.



For enquiries, feedback and complaints, please call toll-free number **09612003355** or write to us at **weassure.apbl@asianpaints.com**

Asian Paints Bangladesh Ltd.

Head Office: The Pearl Trade Centre (PTC), Cha-90/3, Progoti Sarani, North Badda, Dhaka - 1212. Phone: 09612003355

Factory & Registered Office: Gazipur Factory - Plot# 317 & 757, Bahadurpur, Gazipur-1703 | Mirsarai Factory - Plot # 36, Zone 6, Mirsarai Economic Zone, Bangabandhu Sheikh Mujib Industrial City, Chittagong - 4324